



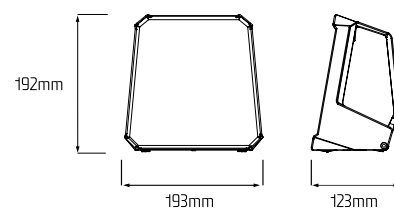


# MAGNUM FUTURE LED XS 20W

## NAŚWIETLACZE / FLOODLIGHTS

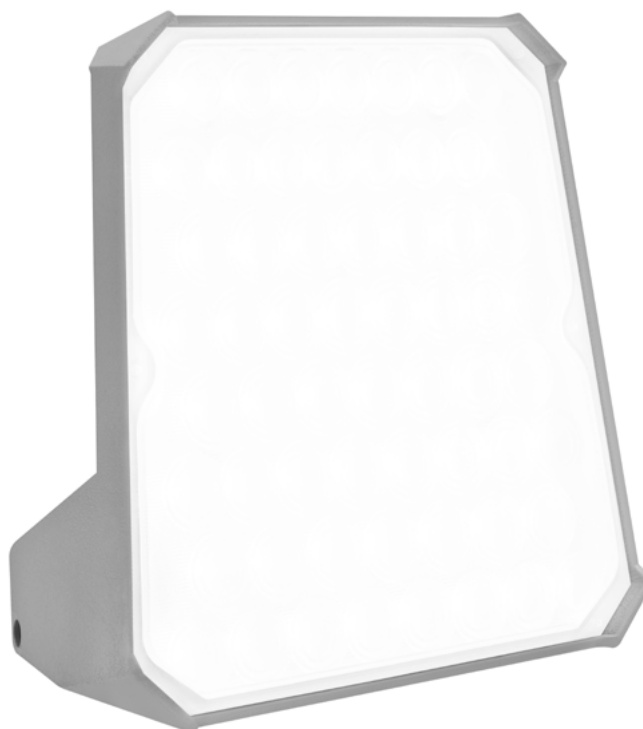

LED | IK10 | IP54 | IP44 | 220-240V 50-60Hz | 24V | 48V |  |  | CE | 



- Źródło światła: wysokowydajne LED GO!
- Maksymalny strumień świetlny: 2000lm
- Moc: 20W
- Stopień szczelności: IP 44/54
- Rozsył światła 120° lub 45°
- Uderzenioodporna obudowa
- Wielopozycyjne ramię
- Anty-olśnieniowy klosz wykonany z mrożonego poliwęglanu
- Ergonomiczna rączka
- Innowacyjne i różnorodne możliwości montażu
- Przewód gumowy H07RN-F (3m)

#### Opcjonalnie dostępne:

- Gniazdo wbudowane w tylnej części oprawy
- Wersja nisko-napięciowa 24V-48V

#### Akcesoria:

- Magnes
- Opaska zaciskowa
- Statyw

- Light source: highly efficient LED GO!
- Total luminous flux: 2000lm
- Power: 20W
- Ingress protection IP 44/54
- Light beam 120° or 45°
- Impact-resistant casing
- Multi-positional arm
- Anti-glare diffuser made of frozen polycarbonate
- Ergonomic movable handle
- Various, smart solutions for mounting the luminaire
- Rubber cable H07RN-F (3m)

#### Available versions:

- Version with socket
- Low Voltage version 24V-48V

#### Accessories:

- Magnet
- Zap-strap (universal holder)
- Tripod

# MAGNUM FUTURE LED XS 20W

## NAŚWIETLACZE / FLOODLIGHTS

index	moc power [W]	napięcie zasilające power supply [V]	kąt rozsyłu beam angle	IP	rodzaj wtyczki plug type	gniazda sockets	kl.ochronności protection class	wyłącznik switch	waga weight [kg]
<b>MAGNUM FUTURE LED XS 20W 120°</b>									
248351	20	220-240	120°	54	UNI-SCHUKO	-	II	-	0,9
248368	20	220-240	120°	54	UNI-SCHUKO	PL-FR	I	-	1,0
248375	20	220-240	120°	54	UNI-SCHUKO	PL-FR	I	+	1,0
248405	20	220-240	120°	54	UNI-SCHUKO	SCHUKO	I	-	1,0
248412	20	220-240	120°	54	UNI-SCHUKO	SCHUKO	I	+	1,0
248474	20	24	120	44	TRAFO	-	III	-	0,9
248467	20	24	120	44	CEE	-	III	-	1,0
248450	20	42-48	120	44	CEE	-	III	-	1,0
248481	20	220-240	120°	44	DK	-	II	-	0,9
248498	20	220-240	120°	44	DK	DK	I	-	1,0
248504	20	220-240	120°	44	DK	DK	I	+	1,0
<b>MAGNUM FUTURE LED XS 20W 45°</b>									
248528	20	220-240	45°	54	UNI-SCHUKO	-	II	-	0,9
248535	20	220-240	45°	54	UNI-SCHUKO	PL-FR	I	-	1,0
248641	20	220-240	45°	54	UNI-SCHUKO	PL-FR	I	+	1,0
248689	20	220-240	45°	54	UNI-SCHUKO	SCHUKO	I	-	1,0
248696	20	220-240	45°	54	UNI-SCHUKO	SCHUKO	I	+	1,0
248740	20	24	45	44	TRAFO	-	III	-	0,9
248733	20	24	45	44	CEE	-	III	-	1,0
248726	20	42-48	45	44	CEE	-	III	-	1,0
248757	20	220-240	45°	44	DK	-	II	-	0,9
248764	20	220-240	45°	44	DK	DK	I	-	1,0
248771	20	220-240	45°	44	DK	DK	I	+	1,0

